

TITAN 500^{PRO}

ITS-560 | ITS-561

THE MOST VERSATILE POS TERMINAL

Every curve and detail of TITAN 560 Pro is carefully thought out to make it sleek, rugged, reliable and easy for maintenance. With aluminium die-casting housing, fan free cooling system, splash and dust proof, rich I/O ports, industrial grade LCD and mother board - it is the ideal choice for POS terminal.




Features

Stylish design

Rich availability of I/O ports




Fan-free design

Industrial grade quality




Technical Specifications

Model Number		ITS-561	ITS-560
CPU Support		Intel Core i5 TIGERLAKE 11th Gen 1155G7 2.5GHz	Core i5 SKYLAKE 6th Gen 6300U 2.4GHz
System Memory		1 x 8GB DDR4 12800S SO-DIMM (Max. 64GB)	1 x 8GB DDR4 12800S SO-DIMM (Max. 16GB)
Storage	SATA	1 x 2.5" M.2 SSD 256GB (512GB Optional)	1 x 2.5" SATA SSD 256GB (512GB Optional)
	mSATA/M.2		1 x mSATA-SSD (Optional)
LCD	Size	15" TFT LCD Panel	
	Brightness	350cd/m2 (Typ.)	
	Resolution	1024 x 768	
Touch Screen		True-Flat Projected Capacitive Touch	
Tilt Angle		0 ~ 60 degree	
External I/O Port	USB	4 x USB 3.0 + 2 x USB 2.0	
	Serial port	2 x Serial port (RJ50)	3 x Serial port (RJ50); (COM1~3: 0/5/12V by pin-JP)
	VGA	N/A	1 x VGA (Power enable by BIOS; +12V)
	HDMI	1 X HDMI	N/A
	Cash Drawer Port	N/A	1XRJ11, 12V
	LAN	1 x LAN (10/100/1000Mb)	
	Audio	1 x Mic-in/Speaker-out (Combo Jack)	
	DC-In	1 x DC In (4PIN)	
	Power Switch	1 x Power Switch	
Speaker		2 x 2W Speaker (Optional)	
Power		External power adapter, 12V-7A/84W	External power adapter, 12V-5A/60W
EMC Safety		CE, ROHS, FCC	
Environment	Operating Temperature	0°C ~ 35°C	
	Storage Temperature	-15°C ~ 60°C	
	Operating Humidity	20% - 85% RH non condensing	
	Storage Humidity	20% - 85% RH non condensing	
OS Support		Windows 10	
Dimension (W x D x H)		445mm*310mm*415mm	
Weight (N.W./G.W.)		4.7KG / 6.0KG	
Wall Mount		VESA 100 x 100mm	
Optional	WiFi	MPCIE WiFi/BT	
	MSR	MSR + iButton(Combo) or MSR+RFID (Combo), USB (VCOM optional), 1, 2, 3 Track, ISO7810, 7811-1/2///333/4/5, IBM, AAMVA, JIS-2 Standard	
	Scanner	DY3090 (USB 1D, 2D, Reading precision: >=3mil, Dimension: 21.4mm*10.8*15.2mm)	
	Customer Display	VFD display, USB (VCOM), 2X20 characters	
	2nd Display	VGA 9.7" (1024X768), VGA 11.6" (1024X768), VGA 12.1" (1280X800)	

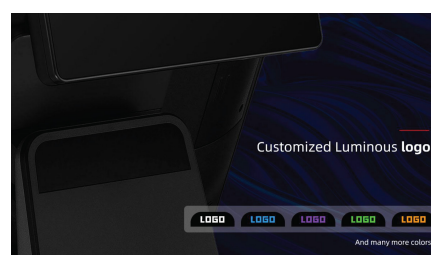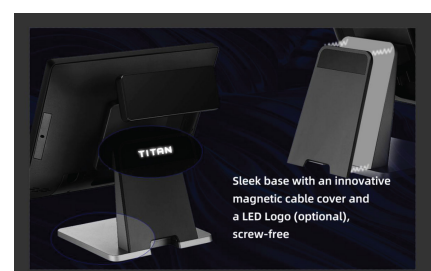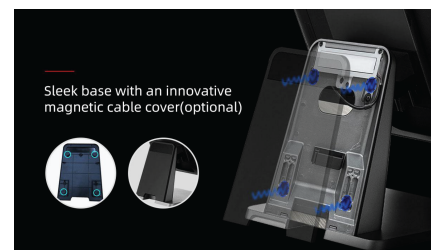

Modular-design: 2nd Display,
MSR, I Button, VFD, RFID, Barcode/2D Scanner

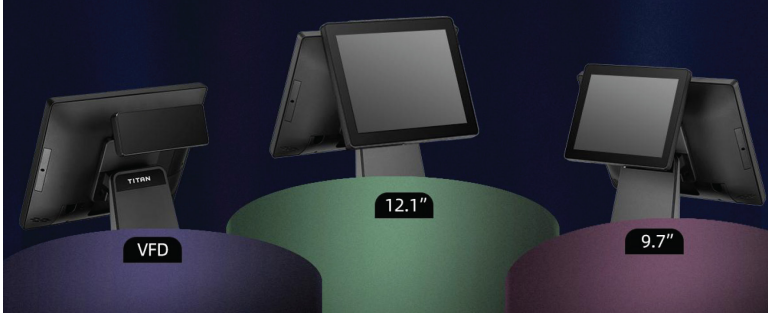

Multi-layer painting for scratchproof

